


## Cove



CO2501




CO2502



Cove is a LED Linear for interior or exterior cove lighting. Made of aluminum with tempered glass. IP65 rated, ideal for numerous residential, retail and hospitality applications. With a clip for easy and fast installation.

# CO2501

## DIMENSION

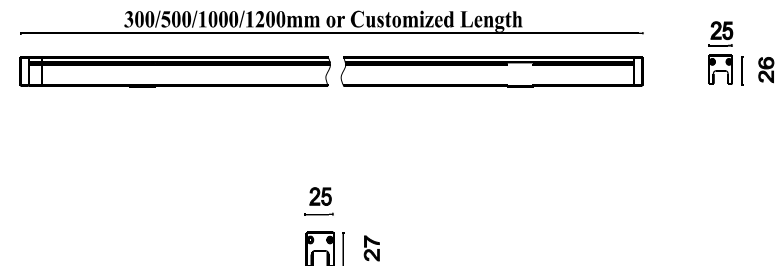

## SPRECIFICATION

Model	CO2501-500	CO2501-1000
Length	500MM	1000MM
Power	6W	12W
LED Quantity	24 nos.	48 nos.
Delivered Lumens	450lm@3000K	876lm@3000K
Color Temperature	2200K   2700K   3000K   4000K   4500K   5000K   6000K   RGB   RGBW	
Beam Angle	Flood 30°   Flood 60°	
Voltage	DC 24V	
Control	PWM   Phase   1-10V   Dali   DMX	
Housing Material	Aluminum housing and tempered glass	
Finishes	Black RAL9011   White RAL9003 or RAL9010   Grey RAL9006   Customized;	
Ingress Protection	IP66	
Mechanical Impact	IK05	
Insulation Class	Class III	
Working Temperature	-35°C to 50°C	




## ACCESSORIES



Bracket

## CO2502

### DIMENSION

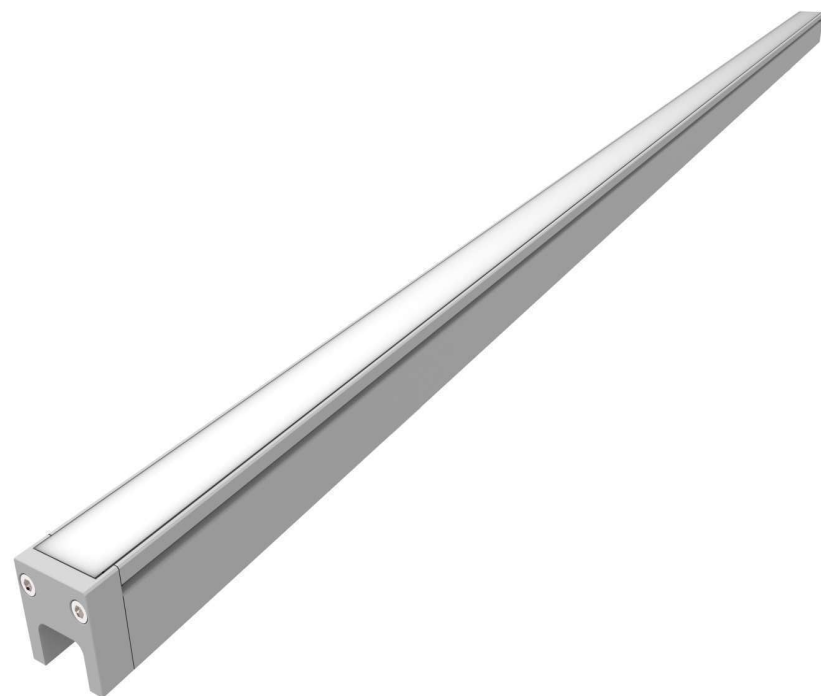


### SPRECIFICATION

Model	CO2502-500	CO2502-1000
Length	500MM	1000MM
Power	6W	12W
LED Quantity	24 nos.	48 nos.
Delivered Lumens	320lm@3000K	580lm@3000K
Color Temperature	2200K   2700K   3000K   4000K   4500K   5000K   6000K   RGB   RGBW	
Voltage	DC 24V	
Control	PWM   Phase   1-10V   Dali   DMX	
Housing Material	Aluminum housing and tempered glass	
Finishes	Black RAL9011   White RAL9003 or RAL9010   Grey RAL9006   Customized;	
Ingress Protection	IP66	
Mechanical Impact	IK05	
Insulation Class	Class III	
Working Temperature	-35°C to 50°C	

### ACCESSORIES



Bracket

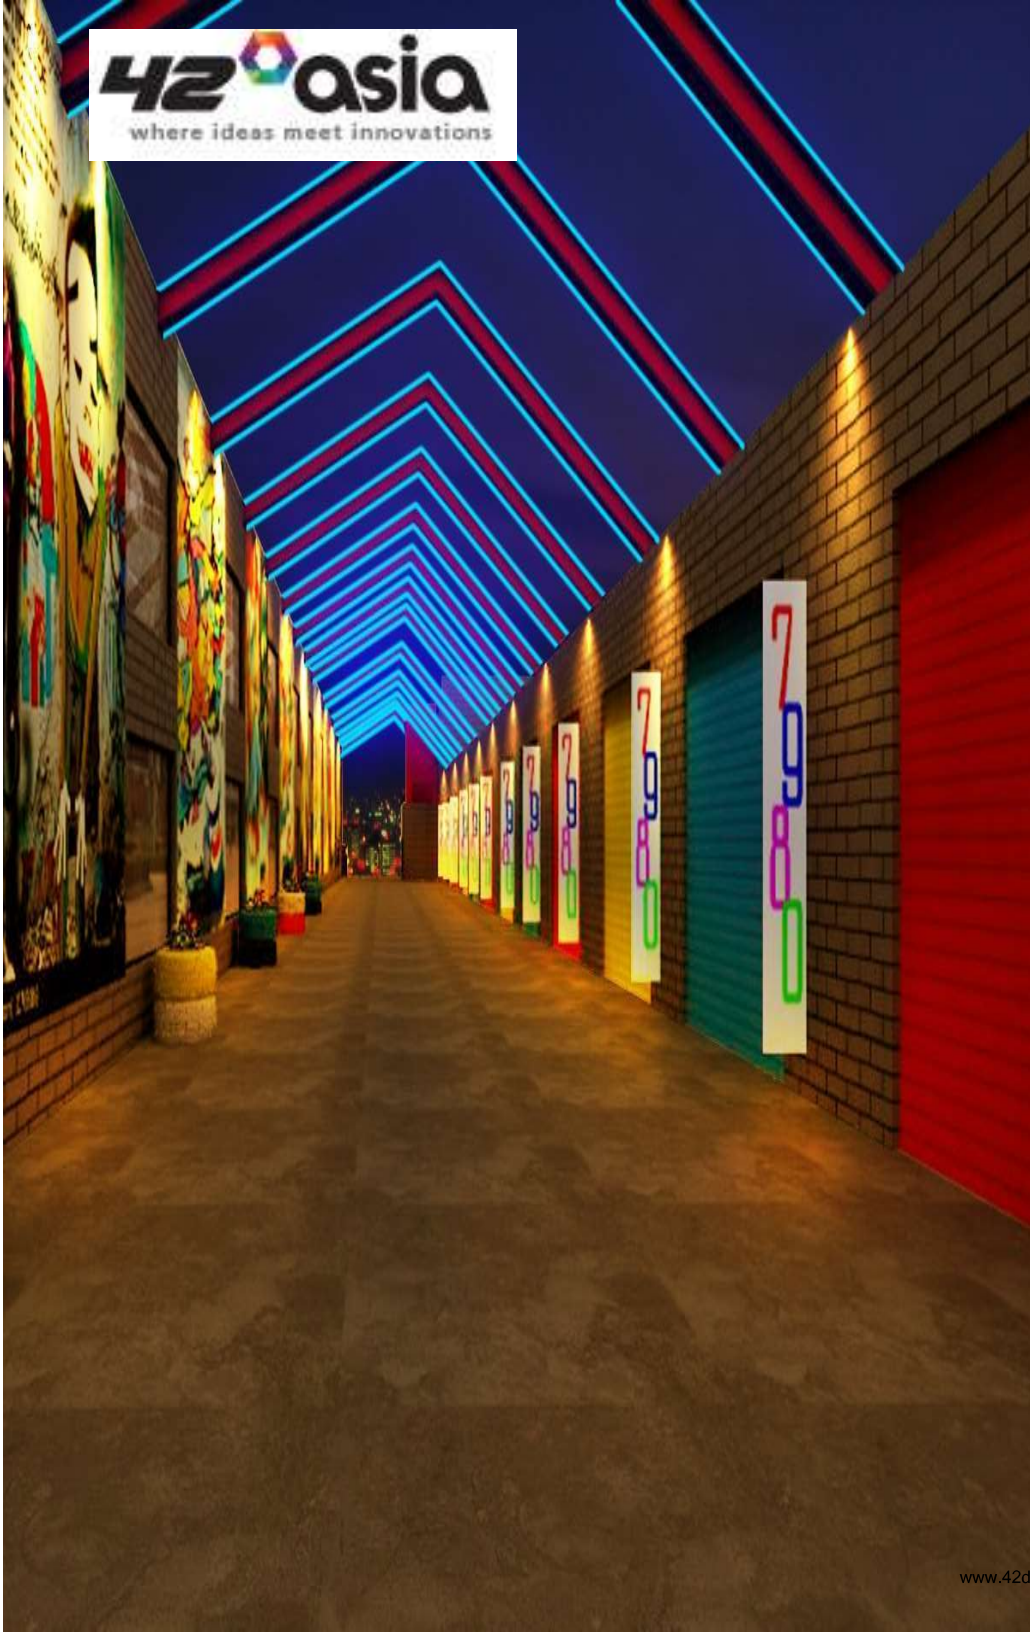

## Clinear



CL2001




CL3001



Clinear is linear LED lighting, made of aluminum and acrylic diffuser to distribute smooth and soft light for direct view. Features customized different color diffuser, ideal for facade contour and decorative lighting.

# CL2001

## DIMENSION

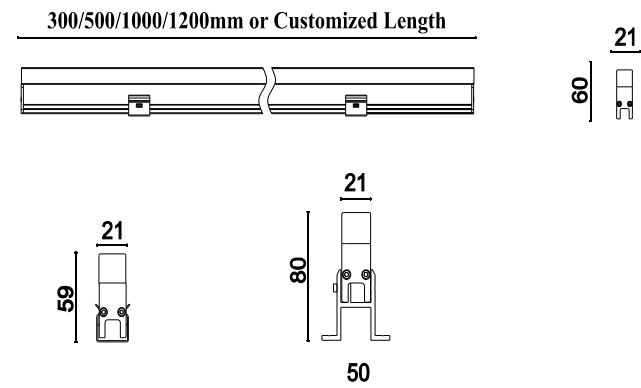

## SPRECIFICATION

Model	CL2001-500	CL2001-1000
Length	500MM	1000MM
Power	6W	12W
LED Quantity	24 nos.	48 nos.
Delivered Lumens	320lm@3000K	580lm@3000K
Color Temperature	2200K   2700K   3000K   4000K   4500K   5000K   6000K   RGB   RGBW	
Voltage	DC 24V	
Control	PWM   Phase   1-10V   Dali   DMX	
Housing Material	Aluminum housing and acrylic diffuser	
Finishes	Black RAL9011   White RAL9003 or RAL9010   Grey RAL9006   Customized;	
Ingress Protection	IP65	
Mechanical Impact	IK05	
Insulation Class	Class III	
Working Temperature	-35°C to 50°C	

## ACCESSORIES



Bracket




Custom Diffuser



## CL3001

### DIMENSION

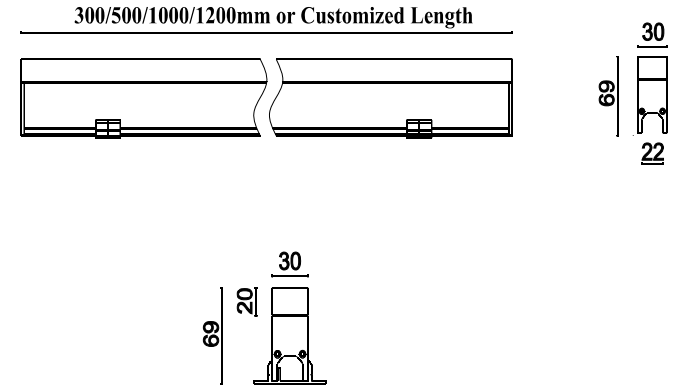

### SPRECFICATION

Model	CL3001-500	CL3001-1000
Length	500MM	1000MM
Power	6W	12W
LED Quantity	24 nos.	48 nos.
Delivered Lumens	320lm@3000K	580lm@3000K
Color Temperature	2200K   2700K   3000K   4000K   4500K   5000K   6000K   RGB   RGBW	
Voltage	DC 24V	
Control	PWM   Phase   1-10V   Dali   DMX	
Housing Material	Aluminum housing and acrylic diffuser	
Finishes	Black RAL9011   White RAL9003 or RAL9010   Grey RAL9006   Customized;	
Ingress Protection	IP65	
Mechanical Impact	IK05	
Insulation Class	Class III	
Working Temperature	-35°C to 50°C	

### ACCESSORIES



Custom Diffuser



## Digitube



**DT2801**




**DT3801**



Digitube is a surface mounted LED linear luminaire for exterior contour lighting application. with an opal white anti-UV polycarbonate cover, no led spot visible and no dark zone between the end by end connection, form a smooth continuous linear bright light when they are in alignment.

# DT2801

## DIMENSION

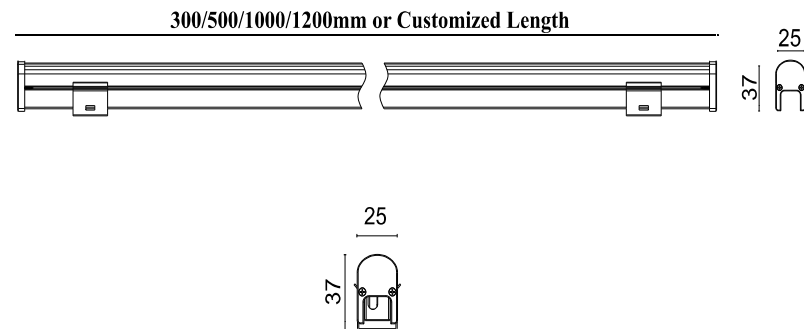

## SPRECIFICATION

Model	DT2801-500	DT2801-1000
Length	500MM	1000MM
Power	5W	10W
LED Quantity	24 nos.	48 nos.
Delivered Lumens	242lm@3000K	480lm@3000K
Color Temperature	2200K   2700K   3000K   4000K   4500K   5000K   6000K   RGB   RGBW	
Voltage	DC 24V	
Control	PWM   Phase   1-10V   Dali   DMX	
Housing Material	Aluminum housing and silicone diffuser	
Finishes	Black RAL9011   White RAL9003 or RAL9010   Grey RAL9006   Customized;	
Ingress Protection	IP66	
Mechanical Impact	IK05	
Insulation Class	Class III	
Working Temperature	-35°C to 50°C	

## ACCESSORIES




Bracket



## DT3801

### DIMENSION

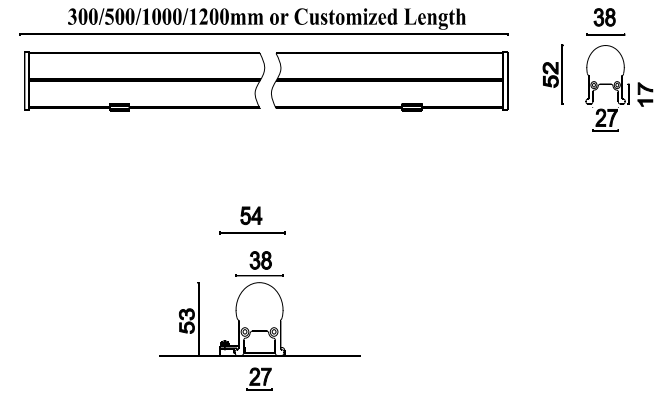

### SPRECIFICATION

Model	DT3801-500	DT3801-1000
Length	500MM	1000MM
Power	5W	12W
LED Quantity	24 nos.	48 nos.
Delivered Lumens	256lm@3000K	520lm@3000K
Color Temperature	2200K   2700K   3000K   4000K   4500K   5000K   6000K   RGB   RGBW	
Voltage	DC 24V	
Control	PWM   Phase   1-10V   Dali   DMX	
Housing Material	Aluminum housing and PC diffuser	
Finishes	Black RAL9011   White RAL9003 or RAL9010   Grey RAL9006   Customized;	
Ingress Protection	IP65	
Mechanical Impact	IK05	
Insulation Class	Class III	
Working Temperature	-35°C to 50°C	